



Search

844.998.3543  
Hours: M - F 8 to 8 ET | Sat 8:30 to 5

- Restaurant Equipment
- Commercial Refrigeration
- Ice Makers
- Kitchen Supplies
- Front of House
- Cleaning & Janitorial
- Restaurant Furniture
- Disposables
- Storage & Transport
- Business Type
- Clearance

KaTom Restaurant Supply / Restaurant Equipment / Food Warmers & Holding Equipment / Holding Cabinets / Proofing Cabinets / Roll-In Proofer w/ 3 Single Rack Capacity, 120 240v/1ph

## Doyon E336R Roll-In Proofer w/ 3 Single Rack Capacity, 120 240v/1ph

Write a Review! KaTom #: 013-E336R2401 • MPN: E336R 2401



Free Shipping Item

**\$20,312.00** /Each

Web price, call us!



Protect Your Product  
Coverage starting at \$125.25

Add Protection

1

Add to Cart



New! Earn up to **\$609.36** back with a  
KaTom MasterCard® Rewards Credit Card

Selected Voltage: **240V, 1 Phase**

208V, 1 Phase

240V, 1 Phase ✓

Ship times may vary due to supply chain constraints. Please contact our Sales Team if you need this item in a specified time frame.

### Doyon E336R Roll-In Proofer w/ 3 Single Rack Capacity, 120 240v/1ph

[Write a Review!](#) KaTom #: 013-E336R2401 • MPN: E336R 2401



**New!** Earn up to **\$609.36** back with a [KaTom MasterCard® Rewards Credit Card](#)

Selected Voltage: **240V, 1 Phase**

208V, 1 Phase

240V, 1 Phase

Ship times may vary due to supply chain constraints. Please contact our Sales Team if you need this item in a specified time frame.

**⚠ Attention:** Order by 09-30-2024 to save before the price increases!

### Doyon E336R Description

The Doyon E336R proofing cabinet is constructed of stainless steel to resist rust, stains, and scratches. The interior floor is made of aluminum to withstand heavy racks. Glass doors and bright lights provide product visibility so operators can check on the dough. The countdown timer enables the operator to keep up with proof time. Its heating system evenly distributes heat and humidity throughout the cabinet and both heat and humidity are electronically controlled. This proofer doesn't need a drain to be used.

### Product Details

- Accepts 3 single racks
- Temperature range: 90-110 degrees F
- Maximum relative humidity: 95 percent
- Airflow heating system maintains an efficient combination of heat and humidity
- Electronically controlled heat and humidity
- Electronic countdown timer
- Stainless steel construction is durable and resists scratches and stains
- Heavy-duty handles on the doors withstand routine use
- Durable interior floor is made of aluminum
- Glass doors enable interior visibility without releasing heat
- Brightly lit interior
- Top-mounted power assembly
- No drain required for operation

### Dimensions & Utilities

- 97<sup>3</sup>/<sub>4</sub> in. W x 40<sup>1</sup>/<sub>2</sub> in. D x 84 in. H
- 31 A, 7.5 kW
- 120-240 V/60 Hz/1 ph

### From The Manufacturer

Proofer Cabinet, roll-in, three-section, capacity three single racks, solid state heat/humidity controls, auto. water entry, full view glass doors, stainless steel interior and exterior, aluminum floor, 120-240v/60/1ph

*\*Image may not depict product color, inclusions or accessories.*

### Resources



- Cabinets: Dry vs. Humidified vs. Proofing
- Choosing a Heated Holding Cabinet
- Picking the Perfect Proofing Cabinet



Limited 2-year Parts; 1-year Labor

### Doyon E336R Specifications

|              |                 |
|--------------|-----------------|
| Manufacturer | Doyon           |
| Application  | Heat & Humidity |
| Construction | Stainless Steel |
| Controls     | Dial            |
| Depth (in)   | 40.5            |
| Door Design  | Full            |
| Door Type    | Glass           |

|                  |                                    |
|------------------|------------------------------------|
| Heat             | Electric                           |
| Height (in)      | 84                                 |
| Hertz            | 60                                 |
| kW               | 7.5                                |
| Sections         | 3                                  |
| Size             | Full Height                        |
| Slide Type       | None                               |
| Type             | Non-Insulated                      |
| Voltage          | 120/240                            |
| Warranty         | Limited 2-year Parts; 1-year Labor |
| Width (in)       | 97.75                              |
| Control Location | Top                                |
| Load Type        | Roll In                            |
| No. of Doors     | 3                                  |
| Phase            | 1                                  |
| Product          | Proofing Cabinets                  |
| Product Type     | Food Warming Equipment             |
| Rack Capacity    | 3                                  |
| Weight           | 1330.00                            |



**Residential Users:** The warranty will not be honored for residential or non-commercial use of any Commercial Equipment.

**⚠ Important Prop 65 information for California residents.**

### Doyon E336R Accessories



**Doyon PLF240**  
Water Filter System

**\$439.00**

### Related Categories



Cookie & Baking Sheets



Queen Mary & Banquet Cart



Holding Cabinets



Food Pan Carriers



Meal Delivery Cart

## Explore More

[Doyon E336R Roll-In Proofer w/ 3 Single Rack Capacity, 120 208v/1ph](#)

[Doyon E336 Roll-In Proofer w/ 2 Single Rack & 10 Shelf Capacity,...](#)

[Doyon E236 Roll-In Proofer w/ 1 Single Rack & 10 Shelf Capacity,...](#)

[Doyon E236TLO Roll-In Proofer For 2 Double Or 4 Single Racks, 120 240v/1ph](#)

## Recently Viewed Products





# TRIPLE DOOR PROOFER



**Proofer Cabinet, Roll-In, Three Section Cavity, Designed in Single Rack, Double Rack, and Shelving Configurations, Solid State Heat & Humidity Controls, Auto Water Entry, Full View Glass Door, Stainless Steel Interior and Exterior, Aluminum Floor, NSF, cETLus, ETL**



PROJECT \_\_\_\_\_  
 ITEM NO. \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 MODEL NUMBER: **E336, E336R, E336TLO**



\*rack not included

**FEATURES**

- Even Airflow Heating System Maintains the Right Combination of Heat and Humidity for Optimal Proofing
- Proofs from Room Temperature up to 110°F (43°C)
- Relative Humidity up to 95%
- Automatic Water Fill System (no water pans required)
- Manual Controls
- Independent Controls for Heat, Humidity and Timer

**CONSTRUCTION**

- Stainless Steel Construction
- Aluminum Flush Floor Entry
- Ships in One Piece

**CLEARANCES**

Minimum Clearance from Combustible Materials:

- 4" (102mm) Sides & Back
- 24" (609mm) Top

**OPTIONS & ACCESSORIES**

- Stainless Steel Door (suffix SD)
- Door Bumpers (suffix DB)
- Prison Package (suffix PPE)
- Water Filter (PLF240) (recommended)
- Additional Side Shelves (E336R only)

**WARRANTY**

- One Year Labor & Two Year Parts




| Model   | Crated Weight | Overall Dimensions |                |            |            | Rack Capacity               | Door Opening  |                |
|---------|---------------|--------------------|----------------|------------|------------|-----------------------------|---------------|----------------|
|         |               | W                  | D              | H          | B          |                             | L             | H              |
| E336    | 1330 (604)    | 97 3/4" (2483)     | 40 1/2" (1029) | 84" (2134) | 36" (914)  | 2 + 10 shelves<br>(3 racks) | 27" (686)     | 73 1/2" (1867) |
| E336R   | 1230 (558)    | 97 3/4" (2483)     | 40 1/2" (1029) | 84" (2134) | 36" (914)  | 3                           | 27" (686)     | 73 1/2" (1867) |
| E336TLO | 1350 (613)    | 116 1/2" (2959)    | 48 1/2" (1029) | 84" (2134) | 44" (1118) | 6 single<br>3 double        | 32 1/2" (826) | 73 1/2" (1867) |





PROJECT \_\_\_\_\_  
 ITEM NO. \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 MODEL NUMBER: **E336, E336R, E336TLO**

**DRAWINGS**

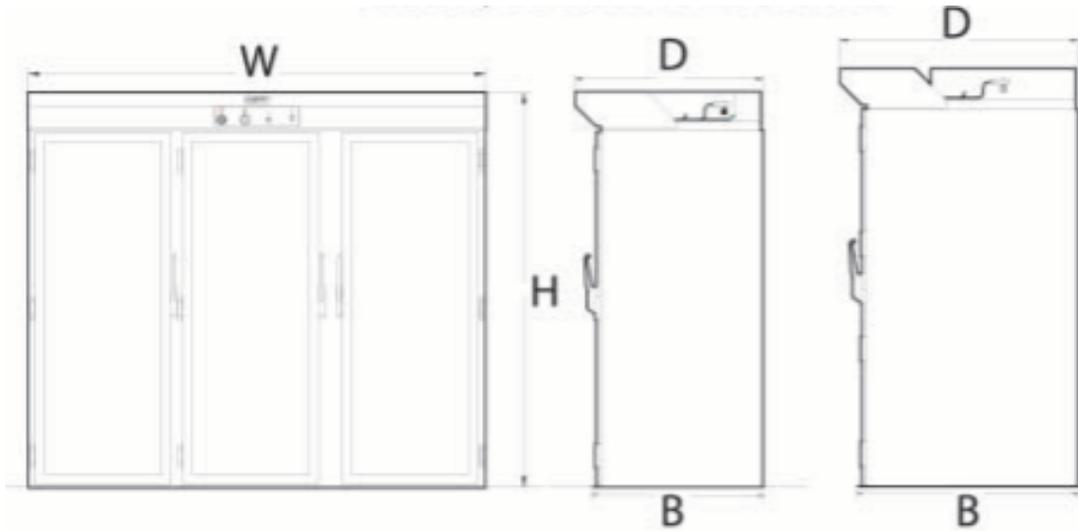

| Model   | Water Inlet | Electrical System* |        |      |      |
|---------|-------------|--------------------|--------|------|------|
|         |             | Volts              | Phases | Amps | kW   |
| E336    | 1/4" (6)    | 120/208            | 1      | 35   | 7.5  |
|         |             | 120/240            | 1      | 31   | 7.5  |
| E336R   | 1/4" (6)    | 120/208            | 1      | 35   | 7.5  |
|         |             | 120/240            | 1      | 31   | 7.5  |
| E336TLO | 1/4" (6)    | 120/208            | 1      | 71   | 14.5 |
|         |             | 120/240            | 1      | 62   | 14.5 |

\*GROUND WIRE NOT INCLUDED

